


SMHW30

Configuration parameter

Parameter		Parameter
Engine	Type	Mitsubishi DO6FRC-TAA
	Rated power	147 kW/2100 rpm
	Max. torque	750 Nm/1350rpm
	Exhaust standard	III stage
	Cylinder/Displacement	6/6.373L
Fuel tank capacity		465L
Movable boom		6.8m
Loading stick		5.6m
Working radius		11.5m
Working height		12m
Working depth		-4.5m
Cabin lifting height		2.65m
Max. rotation speed		8 r/min
Rotation radius		3.31m
Mobile base	Wheelbase	2.8m
	Axle track	2.38m
	Max. Travelling speed	20km/h
Hydraulic	Type	A28VO130E71CPB/10DRVG3R12F1B2S40-0
	Max.flow	460L/min
Main valve		Kawasaki KMX15RB
Slewing bearing		STE SSF1405/50CWH II
Gear reducer		Kawasaki M5×180CHB-12A-5VA/295-149
Safety valve for Movable boom cylinder		Hengli hhrb20p-s398-011-az
Safety valve for Loading stick cylinder		Hengli hhrb20p-s398-011-az
System pressure value		38MPa
Hydraulic tank		230L

SMHW30

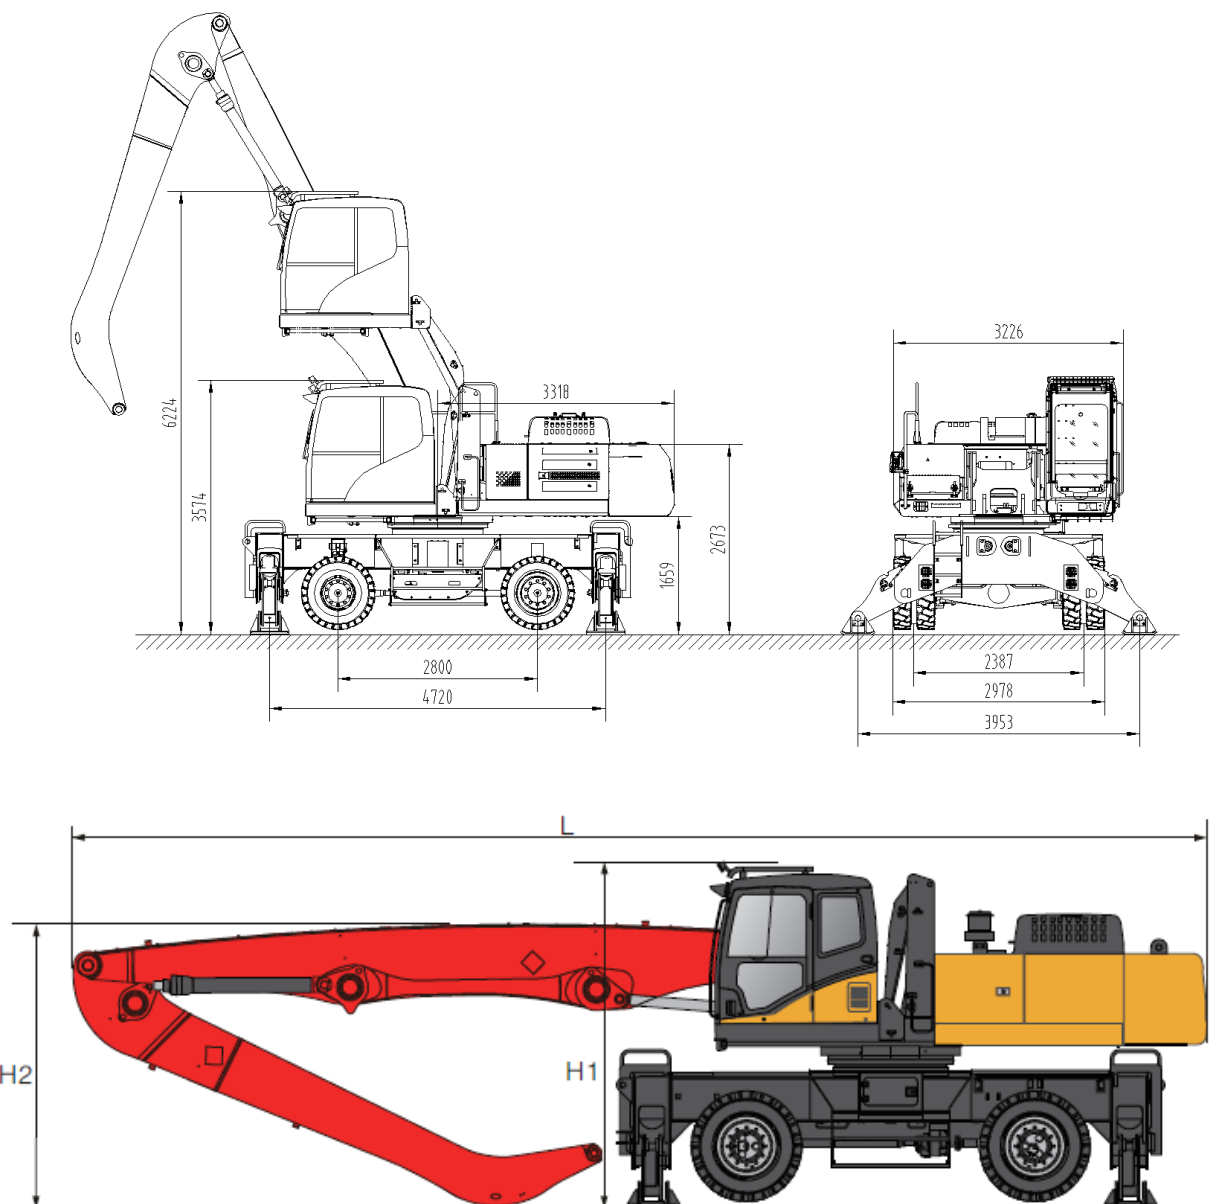

	The length of movable boom hinge point	The length of stick boom hinge point	L	H1	H2
Boom combination	6.8m	5.6m	10.35m	3.79m	3.57m



SANY MARINE HEAVY INDUSTRY CO., LTD.

SANY Industrial Park, Gaolan Port Economic and Development Zone, Zhuhai, Guangdong, China

Tel 0756-7266927 Service 4008 87 8318

Fax 0731-84031999-149 Consulting 4008 87 9318

Email sanyport@sany.com.cn



B03S2CHAS0808-CP