

Specifications

| Models | Z-45 DC & FE | |
|------------------------------------|--------------|---------|
| Measurements | US | Metric |
| Working height maximum* | 51 ft 8 in | 15.92 m |
| Platform height maximum | 45 ft 8 in | 13.92 m |
| Horizontal reach maximum | 22 ft 9 in | 6.94 m |
| Up and over clearance maximum | 24 ft 7 in | 7.50 m |
| A Platform length | 2 ft 6 in | 0.76 m |
| B Platform width | 6 ft | 1.83 m |
| C Height - stowed | 7 ft 6 in | 2.29 m |
| D Length - stowed | 20 ft 1 in | 6.11 m |
| E Width | 7 ft 6 in | 2.29 m |
| F Wheelbase | 6 ft 8 in | 2.03 m |
| G Ground clearance - center | 1 ft 4 in | 0.41 m |

Productivity

| | | |
|--------------------------------|---------------------|-----------|
| Lift capacity | 660 lbs | 300 kg |
| Platform rotation | 160° | 160° |
| Vertical jib rotation | 135° | 135° |
| Turntable rotation | 355° non-continuous | |
| Turntable tailswing | 1 ft 3 in | 0.37 m |
| Drive speed - stowed | 4.5 mph | 7.24 km/h |
| Drive speed - raised** | 0.68 mph | 1.09 km/h |
| Gradeability - 4WD - stowed*** | 45% | 45% |
| Turning radius - inside | 7 ft 10 in | 2.40 m |
| Turning radius - outside | 14 ft 1 in | 4.30 m |
| Controls | 24V DC proportional | |
| Tires | 315/55 D20 | |

Power

| | | |
|-------------------------|--|---------|
| Drive system | 34 V 3-Phase AC | |
| Power source | 48 V DC (eight 6V batteries) | |
| | 370 Ah capacity (AGM, standard on FE) | |
| | 390 Ah capacity (FLA, standard on DC) | |
| | 24.8 hp (18.5kW) Kubota diesel T4f D1105 | |
| | AC generator (FE only) | |
| Auxiliary power unit | 12V DC | 12V DC |
| Hydraulic tank capacity | 10.5 gal | 40 L |
| Fuel tank capacity | 17 gal | 64.35 L |


Weight****

| | | |
|---------|------------|----------|
| Z-45 DC | 14,064 lb | 6,379 kg |
| Z-45 FE | 14,460 lbs | 6,559 kg |

Standards Compliance

ANSI A92.20, CSA B354.6, EN 280, AS 1418.10

Range Of Motion Z-45 DC & FE


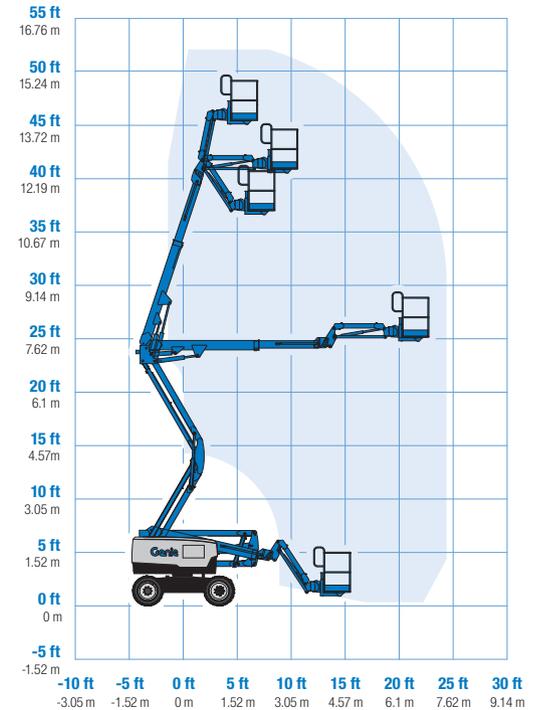


* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** In lift mode (platform raised), the machine is designed to operate on firm, level surfaces only.

*** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.

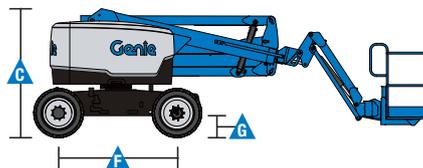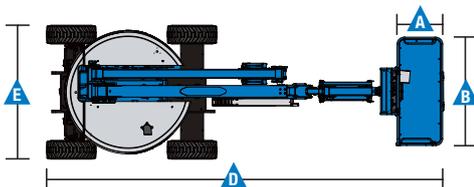

Features

Standard Features

Measurements

Z-45 DC & FE

- 51 ft 8 in (15.92 m) working height
- 22 ft 9 in (6.94 m) horizontal reach
- 24 ft 7 in (7.5 m) up and over clearance
- Up to 660 lbs (300 kg) lift capacity

Productivity

- 5 ft (1.52 m) jib boom with 135° working range
- Digital hour meter with battery charge indicator and diagnostic readout
- 4Wheel AC electric drive system
- Variable speed high efficiency hydraulic power unit
- Self-leveling platform
- Hydraulic platform rotation
- Proportional joystick controls
- Drive enable
- AC power cord to platform
- Horn
- Hour meter
- Tilt alarm
- Flashing beacon and travel alarm
- 355° non-continuous turntable rotation
- Locking turntable covers
- Electronic traction control
- Lift Tools™ Work Tray
- Entry toeboard
- Lift Connect™ Telematics
- Lift Guard™ Contact Alarm
- Dual parallelogram for vertical wall tracking
- Platform Load Sense

Power

- 48 V DC battery pack (370 Ah AGM maintenance-free) (standard on FE)
- 48 V DC battery pack (390 Ah FLA) (standard on DC)
- 12V DC auxiliary power
- 25A temperature compensated smart charge system
- Battery charge indicator
- Low battery voltage interrupt

Easily Configured To Meet Your Needs

Platform Options

- Steel 6 ft (1.83 m) dual entry with side swing gate

Jib

- 5 ft (1.52 m) jib boom with 135° working range

Engine

- 24.8 hp (18.5 kW) Kubota diesel T4f

Drive

- 4WD Electric AC (standard)

Axle

- Active oscillation (standard)

Tire Options

- Rough terrain non-marking foam filled (standard)
- Rough terrain foam-filled

Options & Accessories

Productivity

- Lift Guard Platform Mesh - Half
- Lift Guard Platform Mesh - Full
- Platform top auxiliary rail
- Air line to platform
- Specialty hydraulic oil (fire resistant or biodegradable)
- Hostile environment kit
- Thumb rocker steer
- Pipe cradle (pair)*
- Panel cradle package
- Lockable platform control box cover
- Work and drive light package
- Operator Protective Structure*
- Fall Arrest Bar
- Lift Tools Expo Installer*
- Lift Tools Access Deck*

Power

- 2000W 120V/60Hz, 240V/50Hz or 110V/50Hz power inverter
- 48 V DC battery pack (370 Ah AGM maintenance-free) (standard on FE)
- 48 V DC battery pack (390 Ah FLA) (standard on DC)



* Available aftermarket only

Genie United States

6464 185th Ave. NE
Redmond, WA 98052
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By: